


Klingstone Paths Pump

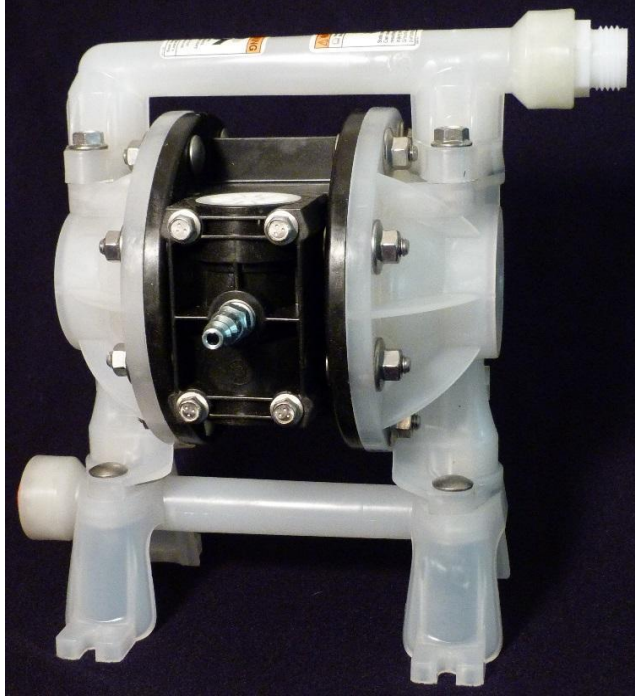

Recommended Installation Pump

Our recommended pump is available for purchase for repeated use, Pump Flush must be used to completely clear the pump of all residue before and after each use.

One application wand and uptake line are included with the aforementioned sale. Additional materials that installers will need are listed below.

Additional Materials

Air Compressor	Minimum 18 gallon capacity, 8+ cfm rating
Air Compressor Hose	Standard 1/4 inch connection
Standard Garden Hose	New, dry, 50 feet or less, 100 psi rating or higher, 5/8" thread
Uptake Lines	PVC construction, <i>included with pump purchase</i>
Application Wand	PVC construction, with ball valve attached, <i>included with pump purchase</i>
Safety Gear	See Safety Data Sheet (SDS)

Technical Information

Non-metallic, air operated, double diaphragm pump
Capable output of 1–14.4 gallons per minute
Powered by an air compressor
10-100 psi inlet/outlet pressure range
1/4 inch male connector to air compressor hose
Standard 5/8" "garden hose thread", the hose connects the pump to the application wand
1/2 inch PVC uptake lines